


Broadband ASE Source

ASE-200

- Broadband, high-power, stable ASE source
- VFD display for easy viewing from shallow angle

1550nm

+23dBm
Output

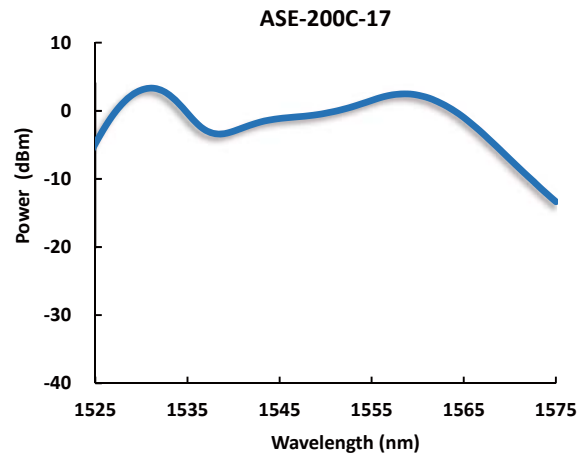

Specifications

	C-band		L-band		unit
	+17 dBm	+23 dBm	+17 dBm	+23 dBm	
Output power	> +17	> +23	> +17	> +23	dBm
Spectral density @1 nm resolution	> -8	> -2	> -12	> -6	dBm
Wavelength range	1528 ~ 1565		1570 ~ 1605		nm
Output stability 5 mins			< +/-0.005		dB
8 hours			< +/-0.02		dB
Output isolation			> 40		dB
Output polarization			< 5		%
Optical fiber			SMF-28e		
Optical connector			FC or SC, SPC or APC		
PC interface			RS-232		
Operating temperature			0 ~ +40		°C
Storage temperature			-10 ~ +70		°C
Power supply			AC 100-240 (50 / 60 Hz)		V
Dimension (W x H x D)			236 x 88 x 380		mm
Weight	4.5		5		kg

1. Please inquire for module type.
The above specifications may change without prior notice.

Ordering Information

ASE - 200 - - -

Wavelength	Output Power	Package Type	Connector Type
C : C-band	13 : +13dBm	B : Benchtop	FS : FC/SPC
L : L-band	15 : +15dBm		FA : FC/APC
CL : CL-band	17 : +17dBm		SS : SC/SPC
	20 : +20dBm		SA : SC/APC
	23 : +23dBm		

