


Ultra-Low-Noise Optical Amplifier

LNA-220

- High-performance EDFA with 50dB gain
- Low-noise amplification of -50dBm signals
- Suitable for experiments with weak optical signals

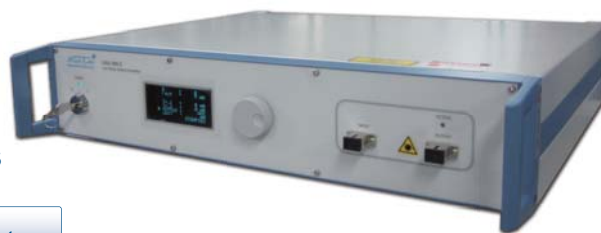

1550nm

-50dBm Input

50dB Gain

NF ~ 3.8dB



Remote

Specifications

	SMF			PMF			unit	
	min.	typ.	max.	min.	typ.	max.		
Operating wavelength	1530		1560	1530		1560	nm	
Saturation output power @ -10dBm input	35 dB type	+10		+10			dBm	
	40 dB type	+16		+16			dBm	
Input power range ¹		-40	-10	-40		-10	dBm	
	@1532 nm, C-band only	-50	-10	-50		-10		
Gain @ -40 dBm input	35 dB type	32	35	32	35		dB	
	40 dB type	40	42	40	42		dB	
	@ 1532 nm, C-band only	35 dB type	43	45	38	40		dB
		40 dB type	50	52	50	52		dB
Noise figure @ -40 dBm input		3.8	4.0	3.2	3.5		dB	
Input / output isolation		30		30			dB	
Polarization dependent gain (PDG)		0.3	0.5	-			dB	
Polarization mode dispersion (PMD)		0.3	0.5	-			ps	
Polarization extinction ratio (PER)		-		20	22		dB	
Optical fiber		SMF-28e		Fujikura SM15-PS-U25				
Optical connector		FC or SC, SPC or APC						
Power supply		AC 100-240 (50 / 60 Hz)					V	
Dimension (W x H x D)		449 x 88 x 380					mm	
Weight		6					kg	

1. Input power where output optical SNR is >3dB. Out-of-band ASE noise may be filtered out using Alnair WTF-200 or BVF-300 series optical filter. For use with CW input only. Please inquire for pulse-compatible EDFAs. The above specifications may change without prior notice.

Typical Performance (SMF, 40dB Gain type)

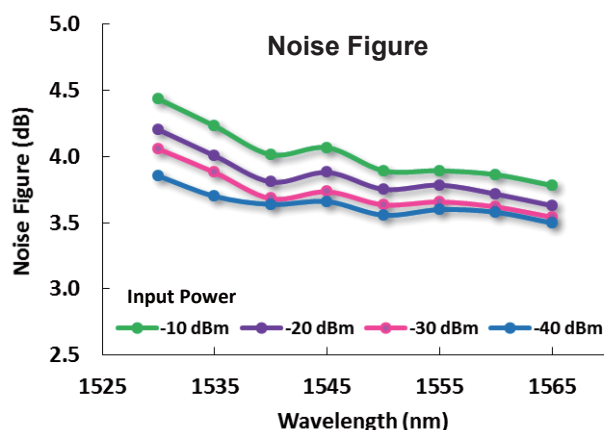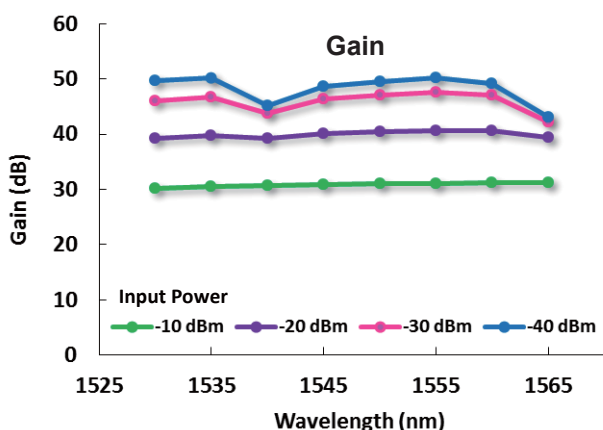

Ordering Information

LNA - 220 - - -

Wavelength	Gain Type	Fiber Type	Connector Type
C : C-band	35 : 35dB	SM : SMF	FS : FC/SPC
L : L-band	40 : 40dB	PM : PMF	FA : FC/APC
CL : CL-band			SS : SC/SPC
			SA : SC/APC

